

## Airborne Industrial Wireless Ethernet Bridge Ethernet to 802.11b/g Wireless LAN

### ABDG-ET-IN5010 Industrial Bridge



Airborne™ is a line of highly integrated 802.11 radios and device servers, designed to address the demands of complex machine-to-machine (M2M) applications. Utilizing the latest 802.11 microprocessor and network technologies, the Airborne family of products provide a broad encompassing solution for wireless applications requiring performance, reliability and advanced security.

The Airborne Industrial Ethernet Bridge allows an Ethernet enabled device to connect to a high performance wireless 802.11 network. The integrated Network Address Translation (NAT) functionality provides plug and play connectivity and simple integration to any system with an Ethernet port. The Ethernet interface supports auto rate detection up to 100Mb/s. The ABDG-ET-IN5010 includes a full featured 802.11b/g radio and a high performance ARM9 MCU running embedded Linux.

#### Enterprise Class Security

WPA2-Enterprise is the leading wireless security standard for enterprise networks and is fully supported by the Airborne Industrial products.

The integrated supplicant supports a wide range of EAP processes including:

- EAP-TLS/MSCHAPv2
- EAP-TLS/MD5
- EAP-TTLS/MSCHAPv2
- PEAPv0/MSCHAPv2
- LEAP

Airborne supports the most flexible certificate delivery and management available in the wireless device market, along with WEP, WPA, WPA2, 802.11i and Pre-shared Key (PSK), no other wireless solution provides a more comprehensive security solution.

#### Reliability

Designed specifically to meet the demands of the industrial, automotive and medical markets, the Airborne Ethernet Bridge has the widest operating temperature range. The industrial series includes a variable power supply input (5-36 VDC) with convenient terminal block and are packaged in a ruggedized metal enclosure to withstand harsh conditions and environments. Quatech also provides FCC Modular certification, minimizing requirements for further regulatory testing by original equipment manufacturers.

#### Applications

Previous generations of Airborne Wireless Ethernet Bridge have been integrated and deployed into a wide range of applications across various industries.

- Industrial Automation
- Vehicle telematics & diagnostics
- Material handling & logistics
- Medical Equipment
- Test & measurement
- Security & access control

#### Model Selection Guide

| Model No.      | Interface |                 | WiFi      | Security           |     |      |      |     |
|----------------|-----------|-----------------|-----------|--------------------|-----|------|------|-----|
|                | 10 Base-T | 10/100 Ethernet | 802.11b/g | WEP (64 & 128 bit) | WPA | WPA2 | LEAP | EAP |
| ABDG-ET-IN5010 |           | ■               | ■         | ■                  | ■   | ■    | ■    | ■   |


#### KEY FEATURES

- Extended operating temperatures (-40° to +85°C) and environmental specifications
- Plug-n-Play Ethernet to 802.11 Connectivity
- Enterprise Class wireless security (WPA2-Enterprise, WPA2-PSK, WPA-PSK, WEP, EAP) with Certificates
- Plug-and-Play LAN and Internet Connectivity
- Rugged Metal Enclosure
- Integrated External Antenna
- Software-configurable 802.11b/g Interface
- Advanced utilities for discovery, configuration and management of Airborne Ethernet device
- Variable DC Power Supply (5-36 VDC) with screw terminal connectors
- Worldwide Certificate Support- FCC Part 15 Class B Sub C Modular Approval, IOC, CE, ETSI, ROHS, WEEE
- 5 year warranty

Quatech's Airborne Enterprise Wireless Ethernet Bridge extends the reputation of the family further by drawing on experience of Quatech application engineers across hundreds of wireless M2M deployments.

The advanced technologies implemented in the Quatech Enterprise 802.11 Ethernet Bridge provide an industry-leading solution with breakthrough performance and security for M2M applications and drop in replacements for existing 802.11b and 802.11b/g networking modules.

## Block Diagram

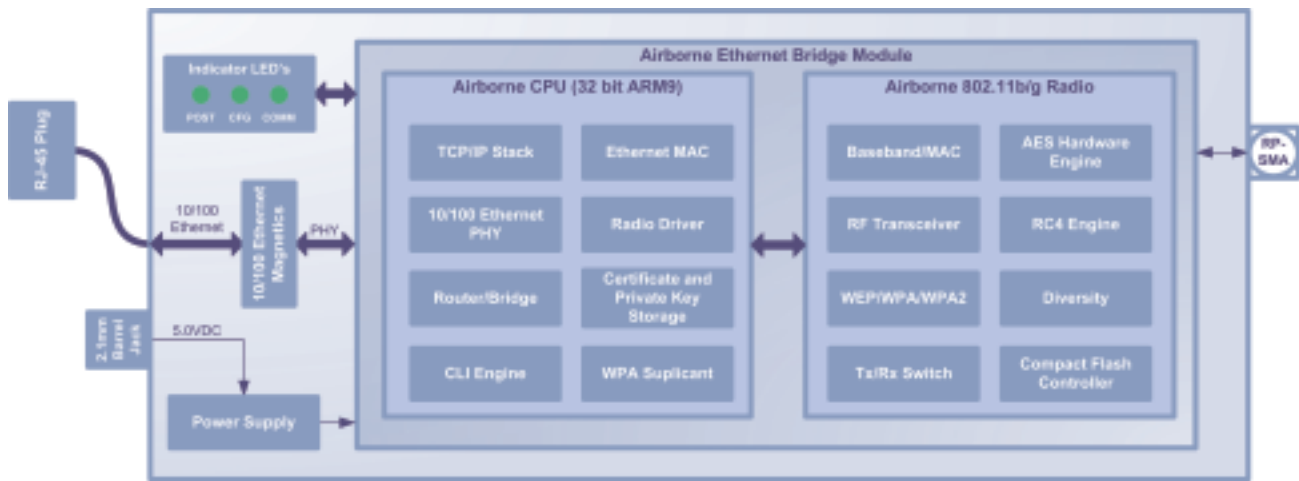

## Package Contents

| Model No.      | Package Includes:   |
|----------------|---|
| ABDG-ET-IN5010 | Airborne Industrial Ethernet Bridge<br>Omni-directional Wand Antenna<br>Installation/Documentation CD |

## Specifications

|                        |  |
|------------------------|--|
| Technology             | IEEE 802.11b/g, WiFi compliant   |
| Wired Interface        | 10/100 Ethernet (auto sense), RJ-45 Plug   |
| Frequency              | 2.4 ~ 2.4835 GHz (US/Canada/Europe)<br>2.4 ~ 2.497 GHz (Japan)   |
| Modulation Technology  | DSSS, CCK, OFDM  |
| Modulation Type        | DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM  |
| Network Access Modes   | Infrastructure, Ad Hoc   |
| Channels               | USA/Canada: 11 channels<br>Europe: 13 channels<br>France: 4 channels<br>Japan: 14 channels (13 channels for 802.11g)   |
| Wireless Data Rate     | 802.11b = 11, 5.5, 2, 1 Mbps<br>802.11g = 54, 48, 36, 24, 18, 12, 9, 6 Mbps  |
| MAC                    | CSMA/CA with ACK, RTS, CTS   |
| Network Protocols      | TCP/IP, ARP, ICMP, DHCP, DNS, UDP, TFTP, UDP, PING   |
| Receive Sensitivity    | 54Mb/s = -69dBm<br>6 Mb/s = -86dBm<br>1Mb/s = -86dBm   |
| Security Protocols     | Disabled, WEP 64 & 128bit, WPA (TKIP), WPA (AES), WPA2 (AES), 802.1x (EAP) Supplicant<br>Supports WPA & WPA2 Enterprise supplicants EAP-TLS/MSCHAPV2, EAP-TTLS/MSCHAPv2, EAP-TTLS(MD5), EAP-PEAPv0/MSCHAPv2, LEAP<br>Zero host security footprint<br>Supports Certificate, delivery and management |
| Antenna                | Integrated RP-SMA Omni-directional 3dBi Antenna  |
| Supply                 | 5-36 VDC +/-5%, 500mA  |
| Supply In-rush Current | 3000mA (MAX) for 20ms  |
| Power Consumption      | 2.5W @5VDC   |
| Power Connector        | 2-Position Terminal Block, 2.1mm Barrel Jack   |
| DC Characteristics     | Operating Current (Tx, 802.11g) = 500mA Typ.<br>Operating Current (Rx, 802.11g) = 530mA Typ.<br>Power Save (Snooze) = 10mA Typ.<br>Power Down (Sleep) = 1mA Typ.   |
| Environmental          | Operating Temperature: -40°C - +85°C, Storage: -55°C - +150°C<br>Relative humidity: 5% - 95% (non-condensing)<br>Vibration: 20G peak-to-peak, 20Hz-2KHz swept<br>Shock: 1500G peak-to-peak, 0.5mS duration   |
| Enclosure              | Ruggedized Metal (Black)   |
| LED Indicators         | 4 Indicator LED (POWER, POST, LINK, COMM)  |
| Agency Approvals       | Worldwide Certificate Support- FCC Part 15 Class B Sub C Modular Approval, IOC, CE, ETSI EN300 328, ETSI 60950-1, ROHS and WEEE Compliant  |

## Mechanical Outline