

5


4

3

2

1


D

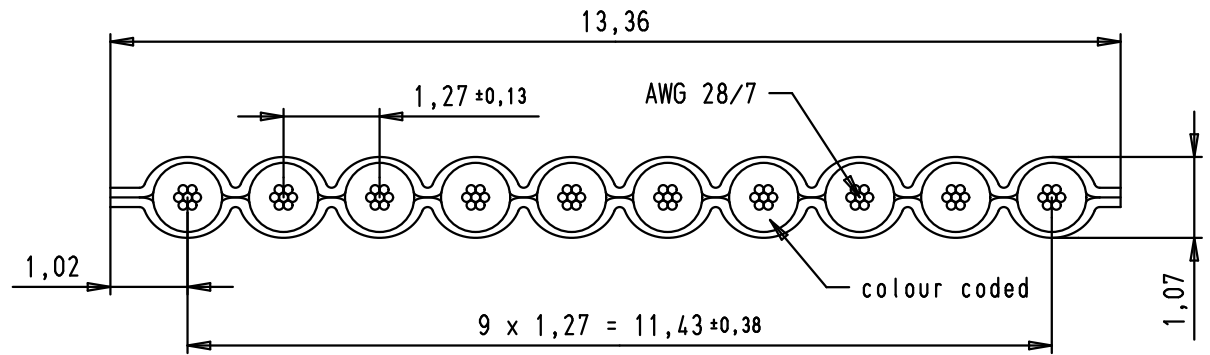

C



- Wire _____ Cu tinned
- Gauge _____ AWG 28/7
- Voltage rating _____ 300 Vr.m.s
- Conductor resistance _____ 221 mΩ/m
- Capacity unbalanced _____ 49 pF/m
- Impedance unbalanced _____ 105 Ω
- Signal delay _____ 5,2 ns/m
- Insulation material _____ PVC
- Temperature rating _____ -20°C to +105°C
- Flammability rating _____ UL: VW1
- Insulation resistance _____ 1000 MΩ/km

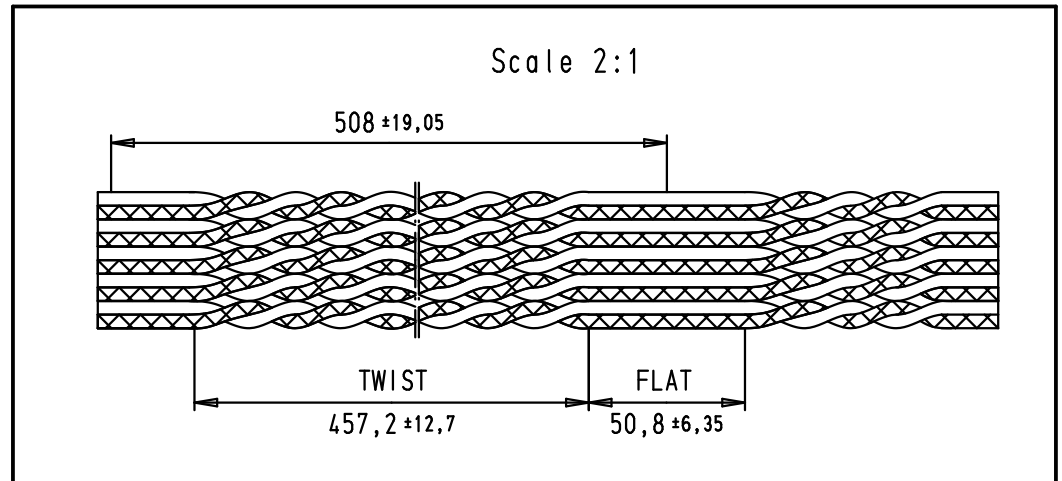B



A

Colour code sequence (in 10 steps):
brown, red, orange, yellow, green,
blue, violet, grey, white, black

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 Flat cable 10 poles, twisted pair, length per reel: 30,48 m colour coded, UL 20130, IEC 918	Maßstab/ Scale
			Detail.	25/10/05	JMDR			10:1
			Insp.					
			Stand.					
33990	15/05/07	PK	HARTING EURL F-95972 Paris				TB 09 18 010 7006	Blatt/ Page
33247	25/10/05	JMDR						1 / 1
Mod.	Dot.	Name						Sub.